




SICHERHEIT DURCH QUALITÄT

Product Specification

SOFT NITRIL WHITE PREMIUM

Disposable Nitrile Examination Gloves

- Powder free
- White
- double chlorinated
- Latex free
- Suitable for handling food
- Non sterile
- Protection against bacteria, viruses and fungi

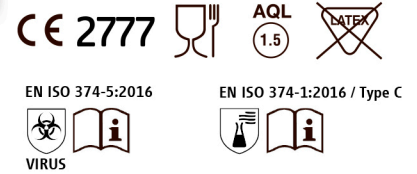

Material Nitril

Performance requirements

Characteristics	Inspection Level	Acceptable Quality Level
Dimensions	S-2	4,0
Physical Properties	S-2	4,0
Freedom from Holes	G-1	1,5
Major Visual defects	G-1	2,5
Minor Visual defects	G-1	4,0

Dimensions

	7010-W	7020-W	7030-W	7040-W	7050-W
Number	7010-W	7020-W	7030-W	7040-W	7050-W
Size	XS = 5-6	S = 6-7	M = 7-8	L = 8-9	XL = 9-10
Width	75 ± 5 mm	80 ± 10 mm	95 ± 10 mm	110 ± 10 mm	≥ 110 mm
Length	≥ 240 mm	≥ 240 mm	≥ 240 mm	≥ 240 mm	≥ 240 mm

Thickness

Measuring Points	Single Wall (mm)
Cuff (distance 25 mm to the beaded edge)	0,08 ± 0,03
Palm (in the middle of the palm)	0,11 ± 0,03
Fingertip (distance 15 mm to top of middle finger)	0,13 ± 0,03

Physical Properties

Standard	Before Aging	After Aging
Median force at break (N)	min. 6,0	min. 6,0
Ultimate Elongation (%)	min.500	min. 400
Tensile strength (MPa)	min. 14,0	min. 14,0

Chemical resistance

Das Produkt entspricht der PSA-Verordnung (EU) 2016/425

Type-Examination (Modul B) & Modul C2

SATRA Technology Europe, Bracetown Business Park, Clonee, D15 YN2P. Ireland (Notified Body 2777)

Prüfchemikalie	EN ISO 374-1:2016 Permeationslevel	EN374-4:2013 Degradation %
Natriumhydroxid 40% (K)	6	-78.9

Powder

No powder lubricant added

Protein content

Hypoallergenic, Thiuram free, No proteins contained

Cuff

Beaded cuff

Design

Ambidextrous

Surface

Micro-roughened finger tips

Color

white

Quality assurance

PSA – EN 374 CAT III - TypC, EN 420; MPG – EN 455 Teil 1-4; EN ISO 13485:2012

Packing Style

100 pcs per dispenser, 10 dispensers per carton

Hint

The above information apply to the standard version. Subject to change.